

“Eccentric-Vein” Fiberglass Stingers


STANLEY FILTER COMPANY



The “Eccentric-Vein” fiberglass stinger is designed to provide high quality downhole filtration with excellent gas separating qualities.



Learning from the past...Preparing for the future

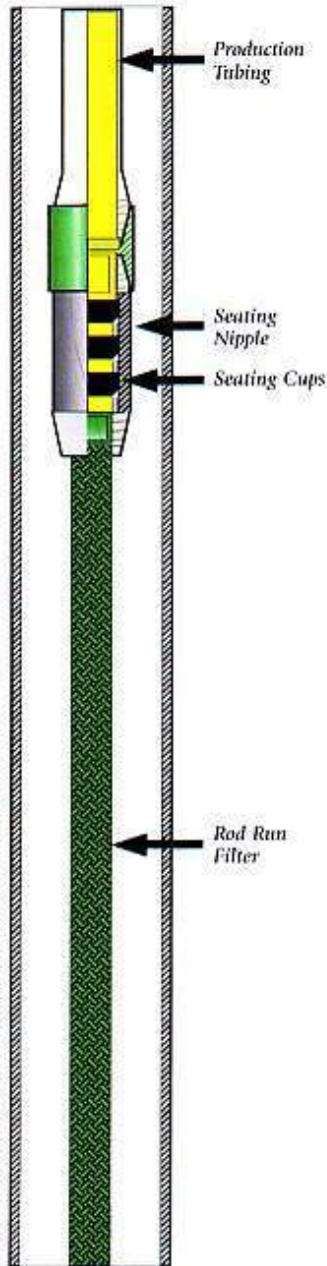

Stinger Installation

The SDH Stinger is attached to the standing valve of the pump.



The Stanley Down Hole Stinger Information

Product	Length	Weight	O.D.	I.D.	Seating Nipple	Connection
SF1000M	4 FT	4 Lbs.	1.5"	.875"	2-3/8"	1" Npt
SF1250M	6 FT	5 Lbs.	2.0"	.95"	2-7/8"	1-1/4" Npt
SF1500M	6 FT	8 Lbs.	2.25"	1.375"	2-7/8"	1-1/2" Npt

Temperature rating is 300° F.

Manufactured with high temperature corrosion resistant fiberglass materials. Resistant to acids, sulfides and most well bore chemical treatments.

Designed to filter out well bore particles larger than 100 mesh.

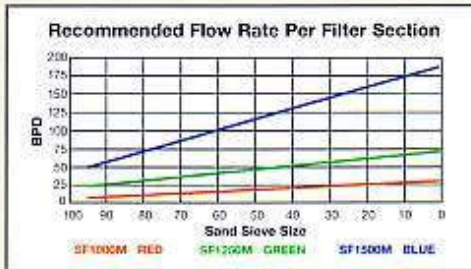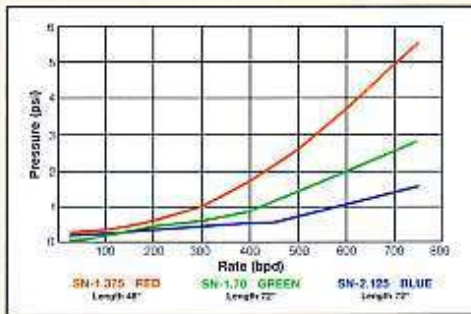

Flow data provided by STEIM-LAB, INC., Duncan, Oklahoma

For more information about the Stanley Filter Gas Separator, contact:

Stanley Filter Company LLC
 10061 E. 52nd St.
 Tulsa, OK 74146
 1-800-545-9926

See us on the web: stanleyfilter.com



*Learning from the past...
 Preparing for the future*